


RTD WITH CABLE (MINERAL INSULATED)

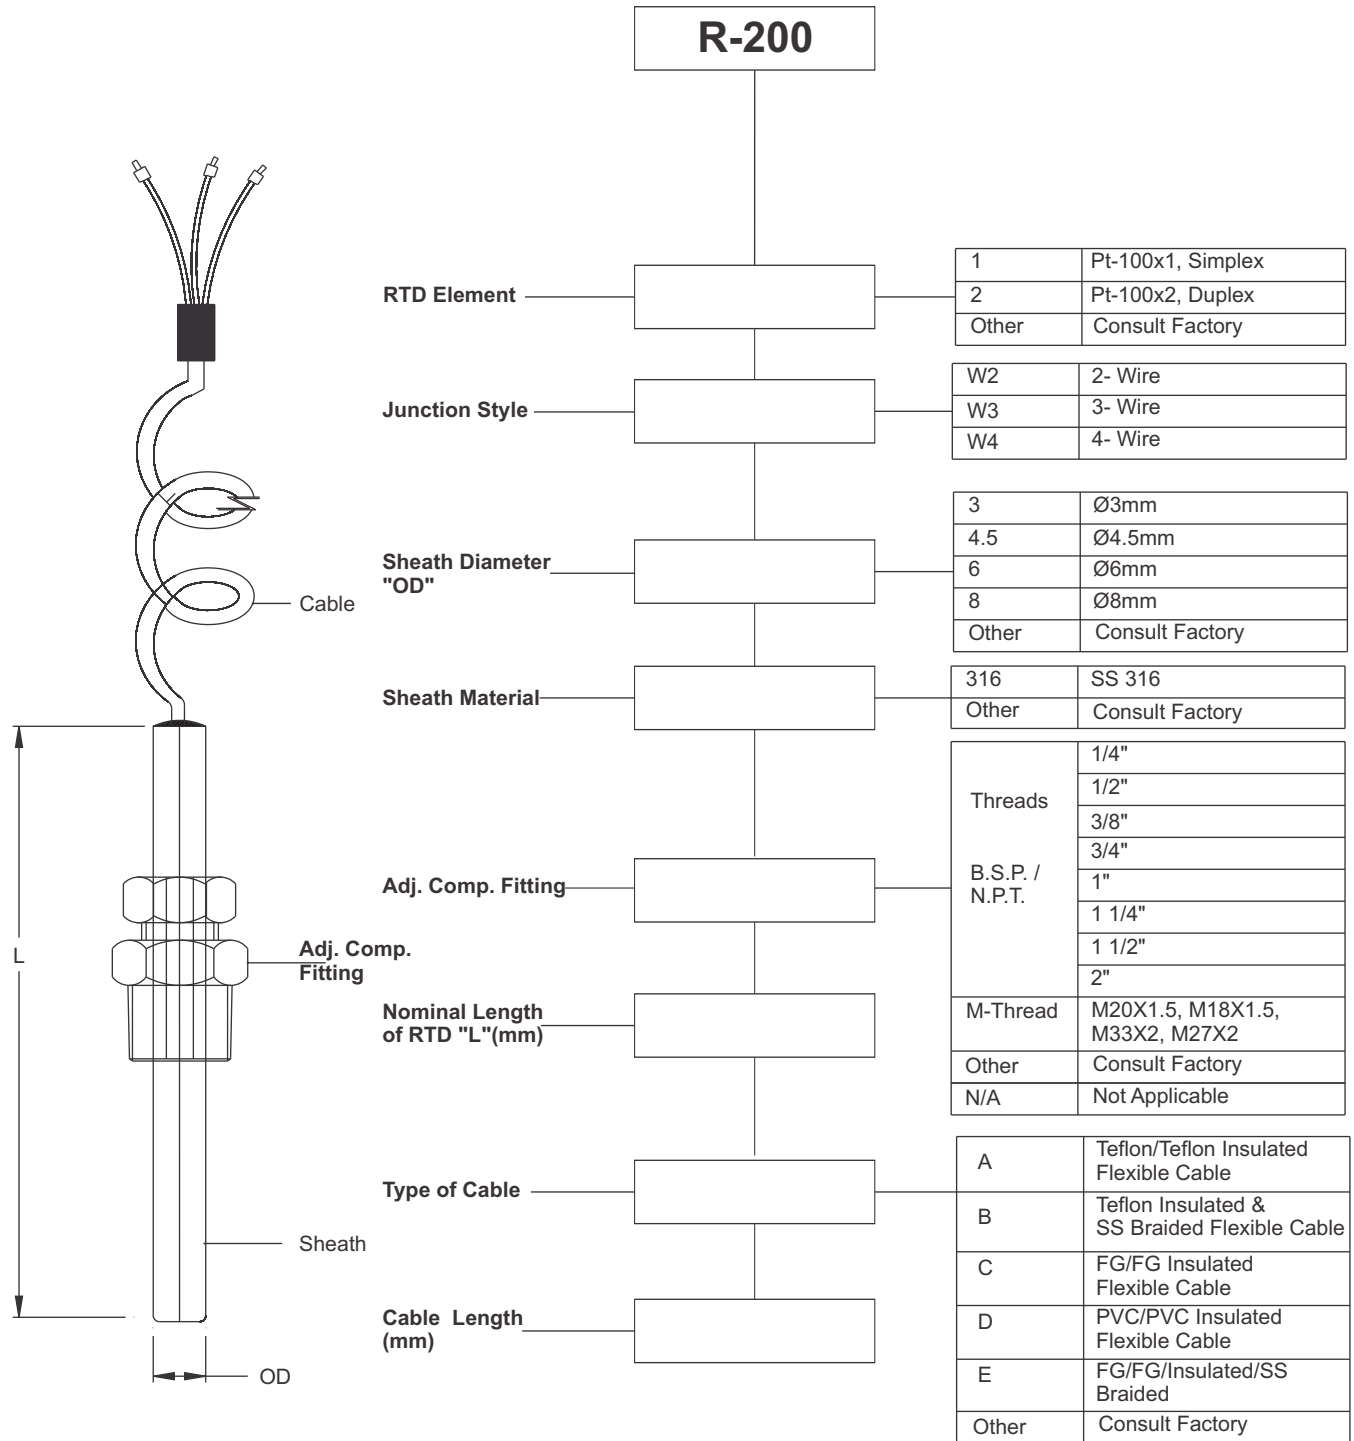

R-200

RTD Element	1	Pt-100x1, Simplex
	2	Pt-100x2, Duplex
	Other	Consult Factory
Junction Style	W2	2- Wire
	W3	3- Wire
	W4	4- Wire
Sheath Diameter "OD"	3	Ø3mm
	4.5	Ø4.5mm
	6	Ø6mm
	8	Ø8mm
	Other	Consult Factory
Sheath Material	316	SS 316
	Other	Consult Factory
Adj. Comp. Fitting	Threads	1/4"
		1/2"
		3/8"
		3/4"
	B.S.P. / N.P.T.	1"
		1 1/4"
		1 1/2"
		2"
M-Thread	M20X1.5, M18X1.5, M33X2, M27X2	
Other	Consult Factory	
N/A	Not Applicable	
Type of Cable	A	Teflon/Teflon Insulated Flexible Cable
	B	Teflon Insulated & SS Braided Flexible Cable
	C	FG/FG Insulated Flexible Cable
	D	PVC/PVC Insulated Flexible Cable
	E	FG/FG/Insulated/SS Braided
	Other	Consult Factory
Nominal Length of RTD "L"(mm)		
Cable Length (mm)		