


# RTD WITH CABLE & FITTING (SPRING LOADED)

B

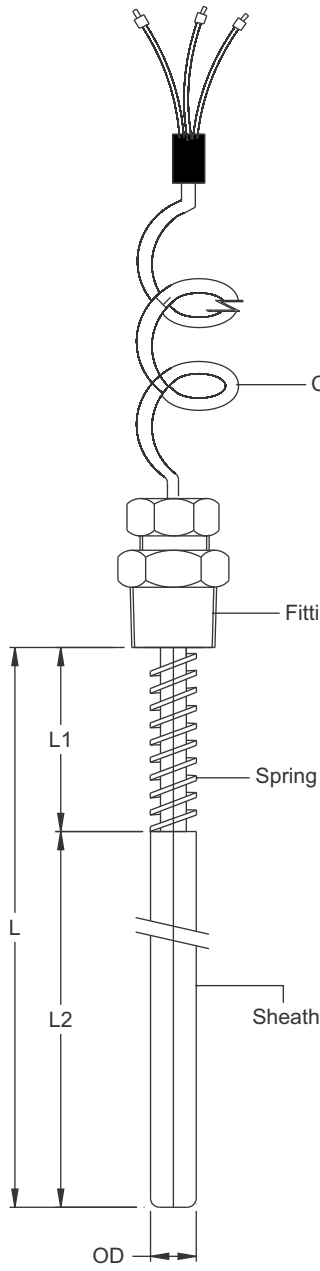

R-204

<b>RTD Element</b>		
		1 Pt-100x1, Simplex
		2 Pt-100x2, Duplex
		Other Consult Factory

<b>Junction Style</b>		
		W2 2- Wire
		W3 3- Wire
		W4 4- Wire

<b>Sheath "OD"</b>		
		3 Ø3mm
		4.5 Ø4.5mm
		6 Ø6mm
		8 Ø8mm
		Other Consult Factory

<b>Sheath Material</b>		
		316 SS 316
		Other Consult Factory

<b>Fitting</b>		
		Threads 1/4"
		1/2"
		3/4"
		3/8"
		1"
		1 1/4"
		1 1/2"
		2"
		B.S.P. / N.P.T.
		M-Thread M20X1.5, M18X1.5, M33X2, M27X2
		Other Consult Factory

<b>Spring Length "L1" (mm)</b>		
<b>Inset Length "L2" (mm)</b>		
<b>Nominal Length of RTD (L)(mm)</b>		
<b>Type of Cable</b>		
		A Teflon/Teflon Insulated Flexible Cable
		B Teflon Insulated & SS Braided Flexible Cable
		C FG/FG Insulated Flexible Cable
		D PVC/PVC Insulated Flexible Cable
		E FG/FG/Insulated/SS Braided
		Other Consult Factory

<b>Cable Length (mm)</b>		
--------------------------	--	--