


RTD WITH STRAIGHT THERMOWELL, ADJUSTABLE COMPENSATION FITTING & CABLE

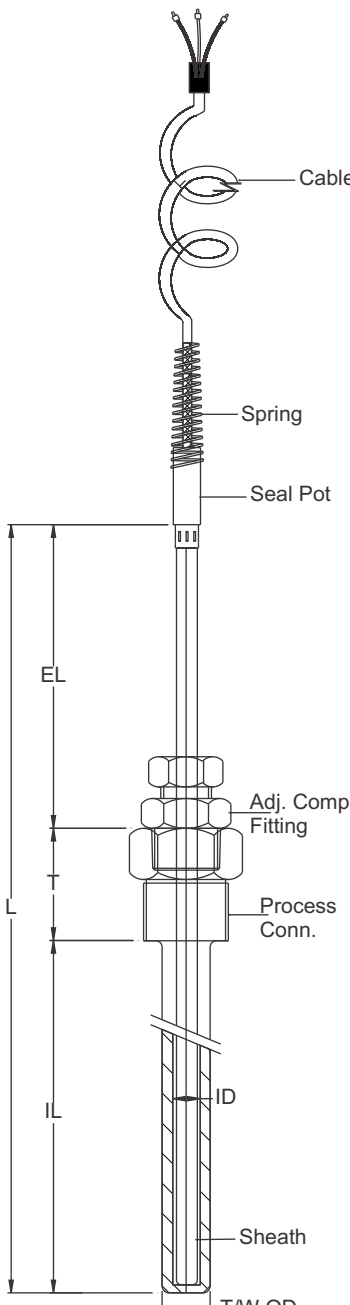

R-504

RTD Element		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>1</td><td>Pt-100x1, Simplex</td></tr> <tr><td>2</td><td>Pt-100x2, Duplex</td></tr> <tr><td>Other</td><td>Consult Factory</td></tr> </table>	1	Pt-100x1, Simplex	2	Pt-100x2, Duplex	Other	Consult Factory									
1	Pt-100x1, Simplex																
2	Pt-100x2, Duplex																
Other	Consult Factory																
Junction Style		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>W2</td><td>2- Wire</td></tr> <tr><td>W3</td><td>3- Wire</td></tr> <tr><td>W4</td><td>4- Wire</td></tr> </table>	W2	2- Wire	W3	3- Wire	W4	4- Wire									
W2	2- Wire																
W3	3- Wire																
W4	4- Wire																
Sheath "OD"		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>3</td><td>Ø3mm</td></tr> <tr><td>4.5</td><td>Ø4.5mm</td></tr> <tr><td>6</td><td>Ø6mm</td></tr> <tr><td>8</td><td>Ø8mm</td></tr> <tr><td>Other</td><td>Consult Factory</td></tr> </table>	3	Ø3mm	4.5	Ø4.5mm	6	Ø6mm	8	Ø8mm	Other	Consult Factory					
3	Ø3mm																
4.5	Ø4.5mm																
6	Ø6mm																
8	Ø8mm																
Other	Consult Factory																
Sheath Material		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>316</td><td>SS 316</td></tr> <tr><td>Other</td><td>Consult Factory</td></tr> </table>	316	SS 316	Other	Consult Factory											
316	SS 316																
Other	Consult Factory																
Thermowell "OD" (mm)		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>316</td><td>SS 316</td></tr> <tr><td>310</td><td>SS 310</td></tr> <tr><td>304</td><td>SS 304</td></tr> <tr><td>600</td><td>Inconel-600</td></tr> <tr><td>800</td><td>Inconel-800</td></tr> <tr><td>446</td><td>HRS-446</td></tr> <tr><td>Other</td><td>Consult Factory</td></tr> </table>	316	SS 316	310	SS 310	304	SS 304	600	Inconel-600	800	Inconel-800	446	HRS-446	Other	Consult Factory	
316	SS 316																
310	SS 310																
304	SS 304																
600	Inconel-600																
800	Inconel-800																
446	HRS-446																
Other	Consult Factory																
Thermowell ID (mm)																	
Thermowell Material																	
Process Connection		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td rowspan="6">Threads</td><td>1/4"</td></tr> <tr><td>1/2"</td></tr> <tr><td>3/8"</td></tr> <tr><td>3/4"</td></tr> <tr><td>1"</td></tr> <tr><td>1 1/4"</td></tr> <tr><td rowspan="3">B.S.P. / N.P.T.</td><td>1 1/2"</td></tr> <tr><td>2"</td></tr> <tr><td>M-Thread</td></tr> <tr><td>Other</td><td>M20X1.5, M18X1.5, M33X2, M27X2</td></tr> <tr><td>Other</td><td>Consult Factory</td></tr> </table>	Threads	1/4"	1/2"	3/8"	3/4"	1"	1 1/4"	B.S.P. / N.P.T.	1 1/2"	2"	M-Thread	Other	M20X1.5, M18X1.5, M33X2, M27X2	Other	Consult Factory
Threads	1/4"																
	1/2"																
	3/8"																
	3/4"																
	1"																
	1 1/4"																
B.S.P. / N.P.T.	1 1/2"																
	2"																
	M-Thread																
Other	M20X1.5, M18X1.5, M33X2, M27X2																
Other	Consult Factory																
Adj. Comp. Fitting																	
Length of "T" (mm)																	
Insertion Length (I.L.) (mm)																	
Extention Length (E.L.) (mm)																	
Nominal Length of T/C (L) (mm)																	
Type of Cable		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>A</td><td>Teflon/Teflon Insulated Flexible Cable</td></tr> <tr><td>B</td><td>Teflon Insulated & SS Braided Flexible Cable</td></tr> <tr><td>C</td><td>FG/FG Insulated Flexible Cable</td></tr> <tr><td>D</td><td>PVC/PVC Insulated Flexible Cable</td></tr> <tr><td>E</td><td>FG/FG/Insulated/SS Braided</td></tr> <tr><td>Other</td><td>Consult Factory</td></tr> </table>	A	Teflon/Teflon Insulated Flexible Cable	B	Teflon Insulated & SS Braided Flexible Cable	C	FG/FG Insulated Flexible Cable	D	PVC/PVC Insulated Flexible Cable	E	FG/FG/Insulated/SS Braided	Other	Consult Factory			
A	Teflon/Teflon Insulated Flexible Cable																
B	Teflon Insulated & SS Braided Flexible Cable																
C	FG/FG Insulated Flexible Cable																
D	PVC/PVC Insulated Flexible Cable																
E	FG/FG/Insulated/SS Braided																
Other	Consult Factory																
Cable Length (mm)																	