


# RTD WITH NIPPLE & STRAIGHT THERMOWELL

B

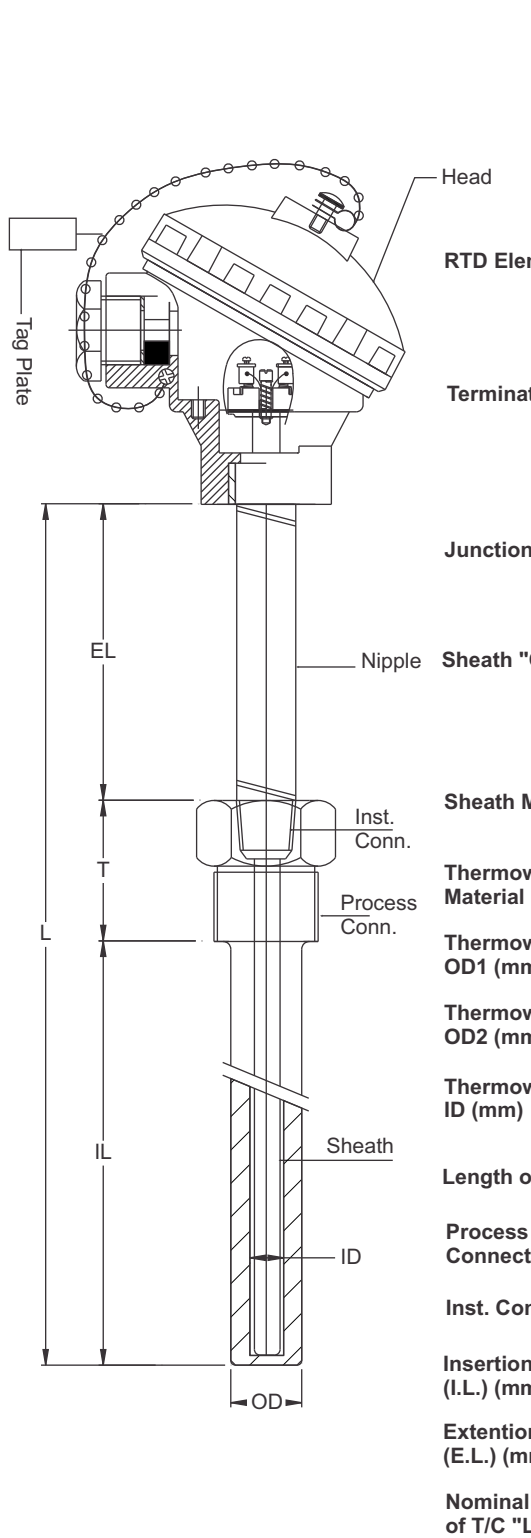

**R-652**

**RTD Element** —

1	Pt-100x1, Simplex
2	Pt-100x2, Duplex
Other	Consult Factory

**Termination Style** —

C	Connection Head IP-67
D	Double entry Head IP-65
EB	Ex-D IIB Zone 1&2
EC	Ex-D IIC
M	Miniature Head
P	Plastic Head
Other	Consult Factory

**Junction Style** —

W2	2- Wire
W3	3- Wire
W4	4- Wire

**Sheath "OD"** —

3	Ø3mm
4.5	Ø4.5mm
6	Ø6mm
8	Ø8mm
Other	Consult Factory

**Sheath Material** —

316	SS 316
Other	Consult Factory

**Thermowell Material** —

316	SS 316
310	SS 310
304	SS 304
600	Inconel-600
800	Inconel-800
446	HRS-446
Other	Consult Factory

**Thermowell OD1 (mm)** —

**Thermowell OD2 (mm)** —

**Thermowell ID (mm)** —

**Length of "T" (mm)** —

**Process Connection** —

Threads	1/4"
	1/2"
	3/4"
	3/8"
	1"
B.S.P. / N.P.T.	1 1/4"
	1 1/2"
	2"
M-Thread	M20X1.5, M18X1.5, M33X2, M27X2
	Other Consult Factory

**Inst. Connection** —

**Insertion Length (I.L.) (mm)** —

**Extension Length (E.L.) (mm)** —

**Nominal Length of T/C "L" (mm)** —