


# RTD WITH N/U/N & COATED TAPER THERMOWELL

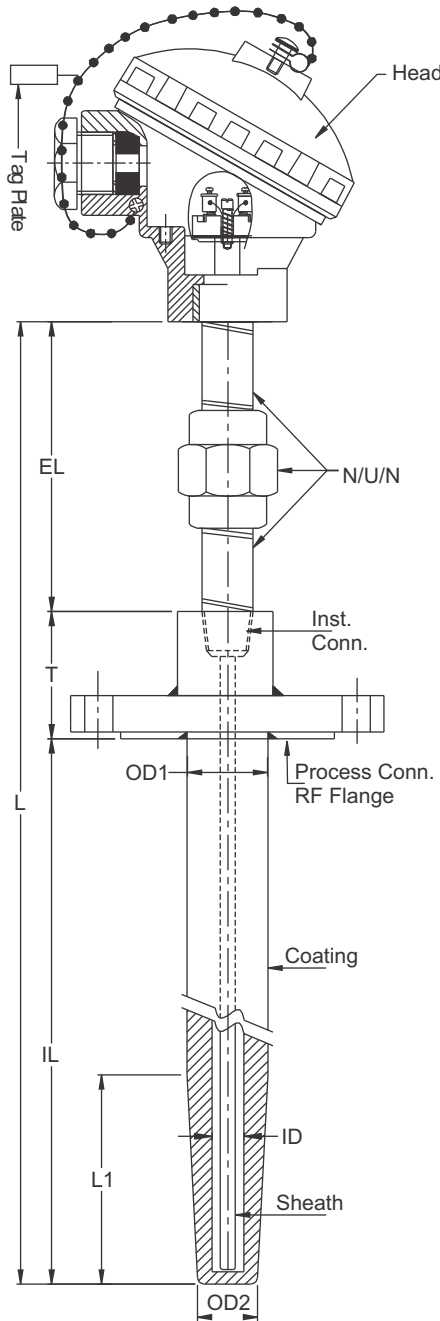

**R-734**

RTD Element

1	Pt-100x1, Simplex
2	Pt-100x2, Duplex
Other	Consult Factory

Termination Style

C	Connection Head IP-67
D	Double entry Head IP-65
EB	Ex-D IIB Zone 1&2
EC	Ex-D IIC
M	Miniature Head
P	Plastic Head
Other	Consult Factory

Junction Style

W2	2- Wire
W3	3- Wire
W4	4- Wire

Sheath "OD"

3	Ø3mm
4.5	Ø4.5mm
6	Ø6mm
8	Ø8mm
Other	Consult Factory

Sheath Material

316	SS 316
Other	Consult Factory

Thermowell Material

316	SS 316
310	SS 310
304	SS 304
600	Inconel-600
800	Inconel-800
446	HRS-446
Other	Consult Factory

Thermowell Od1 (mm)

Thermowell Od2 (mm)

Thermowell ID (mm)

N/U/N

A	1/2" SCH 80
B	1/2" SCH 40
Other	Consult Factory

Length of "T" (mm)

Process Conn.

Inst. Conn.

Insertion Length (I.L.) (mm)

Tapered Length (L1) (mm)

Extention Length (E.L.) (mm)

Nominal Length of T/C "L" (mm)

Outer Coating

Threads	1/4"
	1/2"
	3/4"
	3/8"
	1"
B.S.P. / N.P.T.	1 1/4"
	1 1/2"
	2"
M-Thread	M20X1.5, M18X1.5, M33X2M27X2
Other	Consult Factory

PTFE	PTFE
PFA	PFA
PVDF	PVDF
Other	Consult Factory