


THERMOCOUPLE WITH JUNCTION BOX & ADJUSTABLE COMPENSATION FITTING WITH STUB

A

T-274

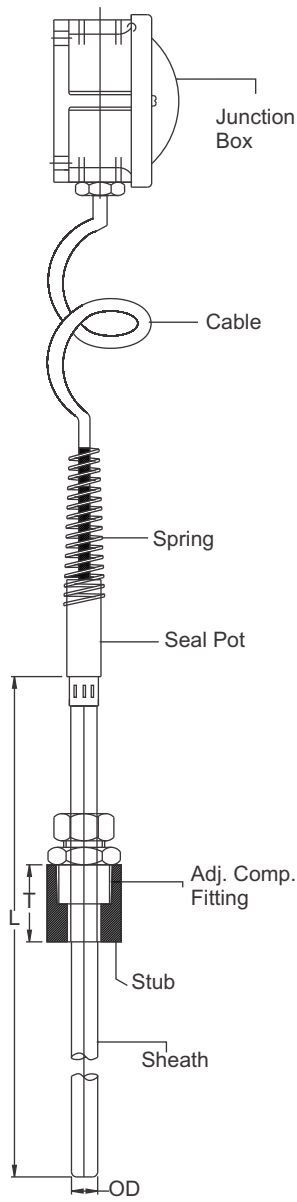

Termination Style	<input type="text"/>	J	Junction Box																
		Other	Consult Factory																
Junction Style	<input type="text"/>	GN	Grounded																
		UN	Ungrounded																
Thermocouple Element	<input type="text"/>	<table border="1"> <thead> <tr> <th>Type of T/C</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>K</td> <td>Chromal/Alumal</td> </tr> <tr> <td>J</td> <td>Iron/Constantan</td> </tr> <tr> <td>N</td> <td>Nicrosil-Nisil</td> </tr> <tr> <td>T</td> <td>Copper/Constantan</td> </tr> <tr> <td>E</td> <td>Ni-Cr/Constantan</td> </tr> <tr> <td>Other</td> <td>Consult Factory</td> </tr> <tr> <td>Ex. :</td> <td>If Simplex - K Duplex - KK</td> </tr> </tbody> </table>		Type of T/C	Description	K	Chromal/Alumal	J	Iron/Constantan	N	Nicrosil-Nisil	T	Copper/Constantan	E	Ni-Cr/Constantan	Other	Consult Factory	Ex. :	If Simplex - K Duplex - KK
Type of T/C	Description																		
K	Chromal/Alumal																		
J	Iron/Constantan																		
N	Nicrosil-Nisil																		
T	Copper/Constantan																		
E	Ni-Cr/Constantan																		
Other	Consult Factory																		
Ex. :	If Simplex - K Duplex - KK																		
Sheath "OD"	<input type="text"/>	<table border="1"> <tbody> <tr> <td>1</td> <td>Ø1mm</td> </tr> <tr> <td>1.5</td> <td>Ø1.5mm</td> </tr> <tr> <td>3</td> <td>Ø3mm</td> </tr> <tr> <td>4.5</td> <td>Ø4.5mm</td> </tr> <tr> <td>6</td> <td>Ø6mm</td> </tr> <tr> <td>8</td> <td>Ø8mm</td> </tr> <tr> <td>Other</td> <td>Consult Factory</td> </tr> </tbody> </table>		1	Ø1mm	1.5	Ø1.5mm	3	Ø3mm	4.5	Ø4.5mm	6	Ø6mm	8	Ø8mm	Other	Consult Factory		
1	Ø1mm																		
1.5	Ø1.5mm																		
3	Ø3mm																		
4.5	Ø4.5mm																		
6	Ø6mm																		
8	Ø8mm																		
Other	Consult Factory																		
Sheath Material	<input type="text"/>	<table border="1"> <tbody> <tr> <td>316</td> <td>SS 316</td> </tr> <tr> <td>310</td> <td>SS 310</td> </tr> <tr> <td>600</td> <td>Inconel-600</td> </tr> <tr> <td>Other</td> <td>Consult Factory</td> </tr> </tbody> </table>		316	SS 316	310	SS 310	600	Inconel-600	Other	Consult Factory								
316	SS 316																		
310	SS 310																		
600	Inconel-600																		
Other	Consult Factory																		
Process Conn.	<input type="text"/>	<table border="1"> <tbody> <tr> <td rowspan="7">Threads</td> <td>1/4"</td> </tr> <tr> <td>1/2"</td> </tr> <tr> <td>3/8"</td> </tr> <tr> <td>3/4"</td> </tr> <tr> <td>1"</td> </tr> <tr> <td>1 1/4"</td> </tr> <tr> <td>1 1/2"</td> </tr> <tr> <td rowspan="3">B.S.P. / N.P.T.</td> <td>2"</td> </tr> <tr> <td>M-Thread</td> <td>M20X1.5, M18X1.5, M33X2, M27X2</td> </tr> <tr> <td>Other</td> <td>Consult Factory</td> </tr> </tbody> </table>		Threads	1/4"	1/2"	3/8"	3/4"	1"	1 1/4"	1 1/2"	B.S.P. / N.P.T.	2"	M-Thread	M20X1.5, M18X1.5, M33X2, M27X2	Other	Consult Factory		
Threads	1/4"																		
	1/2"																		
	3/8"																		
	3/4"																		
	1"																		
	1 1/4"																		
	1 1/2"																		
B.S.P. / N.P.T.	2"																		
	M-Thread	M20X1.5, M18X1.5, M33X2, M27X2																	
	Other	Consult Factory																	
Stub Length "T" (mm)	<input type="text"/>																		
Nominal Length of T/C (L) (mm)	<input type="text"/>																		
Type of Cable	<input type="text"/>	<table border="1"> <tbody> <tr> <td>A</td> <td>Teflon/Teflon Insulated Flexible Cable</td> </tr> <tr> <td>B</td> <td>Teflon Insulated & SS Braided Flexible Cable</td> </tr> <tr> <td>C</td> <td>FG/FG Insulated Flexible Cable</td> </tr> <tr> <td>D</td> <td>PVC/PVC Insulated Flexible Cable</td> </tr> <tr> <td>E</td> <td>FG/FG/Insulated/SS Braided</td> </tr> <tr> <td>Other</td> <td>Consult Factory</td> </tr> </tbody> </table>		A	Teflon/Teflon Insulated Flexible Cable	B	Teflon Insulated & SS Braided Flexible Cable	C	FG/FG Insulated Flexible Cable	D	PVC/PVC Insulated Flexible Cable	E	FG/FG/Insulated/SS Braided	Other	Consult Factory				
A	Teflon/Teflon Insulated Flexible Cable																		
B	Teflon Insulated & SS Braided Flexible Cable																		
C	FG/FG Insulated Flexible Cable																		
D	PVC/PVC Insulated Flexible Cable																		
E	FG/FG/Insulated/SS Braided																		
Other	Consult Factory																		
Cable Length (mm)	<input type="text"/>																		