


THERMOCOUPLE WITH THERMOWELL & ADJUSTABLE FLANGE

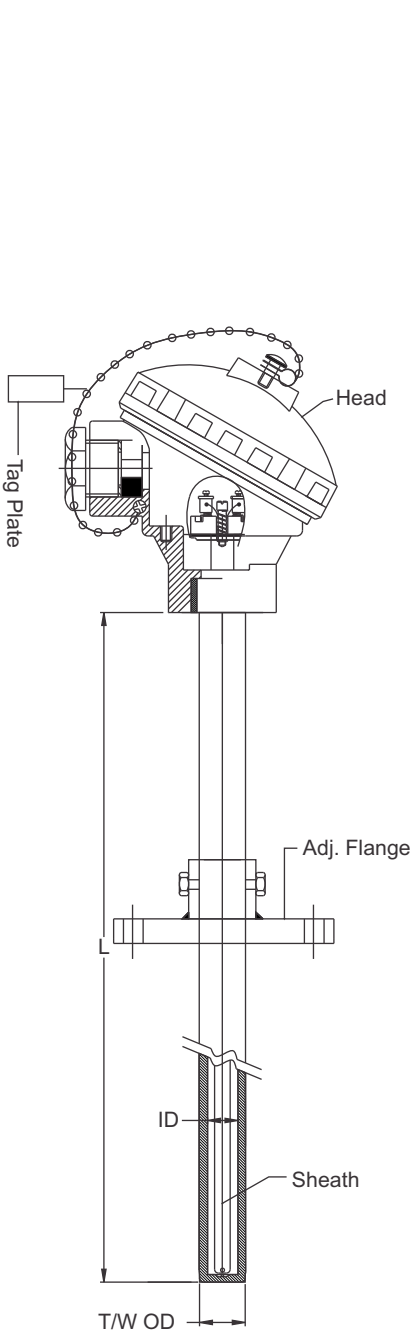

T-502

Termination Style

| | |
|-------|-------------------------|
| C | Connection Head IP-67 |
| D | Double entry Head IP-65 |
| EB | Ex-D IIB Zone 1&2 |
| EC | Ex-D IIC |
| M | Miniature Head |
| P | Plastic Head |
| Other | Consult Factory |

Junction Style

| | |
|----|------------------------|
| GN | Grounded Rounded Tip |
| UN | Ungrounded Rounded Tip |

Thermocouple Element

| Type of T/C | Description |
|-------------|-------------------------------|
| K | Chromal/Alumal |
| J | Iron/Constantan |
| N | Nicrosil-Nisil |
| T | Copper/Constantan |
| E | Ni-Cr/Constantan |
| Other | Consult Factory |
| Ex. : | If Simplex - K Duplex - KK |

Sheath "OD"

| | |
|-------|-----------------|
| 1 | Ø1mm |
| 1.5 | Ø1.5mm |
| 3 | Ø3mm |
| 4.5 | Ø4.5mm |
| 6 | Ø6mm |
| 8 | Ø8mm |
| Other | Consult Factory |

Sheath Material

| | |
|-------|-----------------|
| 316 | SS 316 |
| 310 | SS 310 |
| 600 | Inconel-600 |
| Other | Consult Factory |

Thermowell "OD" (mm)

| | |
|-------|-----------------|
| 316 | SS 316 |
| 310 | SS 310 |
| 304 | SS 304 |
| 600 | Inconel-600 |
| 800 | Inconel-800 |
| 446 | HRS- 446 |
| Other | Consult Factory |

Thermowell "ID" (mm)

Thermowell Material

Process Conn.

Flange material

| | |
|-------|-----------------|
| 316 | SS 316 |
| 310 | SS 310 |
| 304 | SS 304 |
| C S | Cast Steel |
| Other | Consult Factory |

Nominal Length of T/C "L" (mm)