


# THERMOCOUPLE WITH TAPERED THERMOWELL & ADJUSTABLE COMPENSATION FITTING

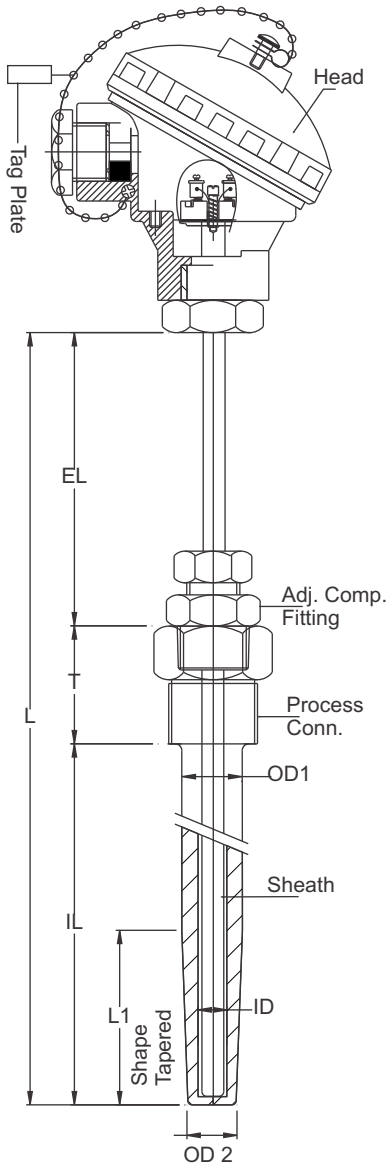

**T-656**

**Termination Style**

**Junction Style**

**Thermocouple Element**

**Sheath "OD"**

**Sheath Material**

**Thermowell Material**

**Thermowell OD1 (mm)**

**Od2 (mm)**

**ID (mm)**

**Length of "T" (mm)**

**Process Conn.**

**Adj. Comp. Fitting**

**Insertion Length (I.L.)(mm)**

**Tapered Length (L1)(mm)**

**Extention Length (E.L.)(mm)**

**Nominal Length of T/C "L"(mm)**

C	Connection Head IP-67
D	Double entry Head IP-65
EB	Ex-D IIB Zone 1&2
EC	Ex-D IIC
M	Miniature Head
P	Plastic Head
Other	Consult Factory

GN	Grounded Rounded Tip
UN	Ungrounded Rounded Tip

Type of T/C	Description
K	Chromal/Alumal
J	Iron/Constantan
N	Nicrosil-Nisil
T	Copper/Constantan
E	Ni-Cr/Constantan
Other	Consult Factory
Ex. :	If Simplex - K Duplex - KK

1	Ø1mm
1.5	Ø1.5mm
3	Ø3mm
4.5	Ø4.5mm
6	Ø6mm
8	Ø8mm

316	SS 316
310	SS 310
600	Inconel-600
Other	Consult Factory

316	SS 316
310	SS 310
304	SS 304
600	Inconel-600
800	Inconel-800
446	HRS-446
Other	Consult Factory

Threads	1/4"
	1/2"
	3/4"
	3/8"
B.S.P. / N.P.T.	1"
	1 1/4"
	1 1/2"
	2"
	M-Thread
Other	Consult Factory