


# THERMOCOUPLE WITH NIPPLE & FLANGE THERMOWELL TAPER

## T- 726

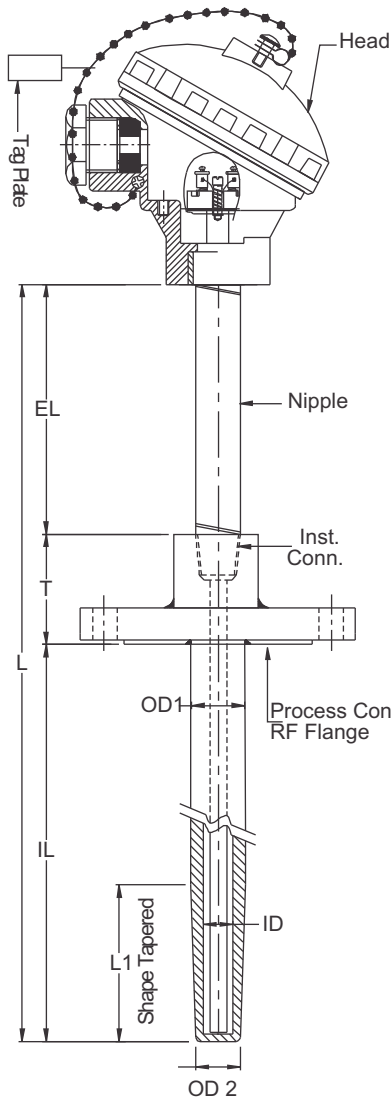

Termination Style

Junction Style

Thermocouple Element

Sheath "OD"

Sheath Material

Thermowell Material

Thermowell OD (mm)

Thermowell ID (mm)

Nipple

Length of "T" (mm)

Process Conn.

Flange Material

Inst. Conn.

Insertion Length (I.L.)(mm)

Extension Length (E.L.)(mm)

Nominal Length of T/C "L" (mm)

C	Connection Head IP-67
D	Double entry Head IP-65
EB	Ex-D IIB Zone 1&2
EC	Ex-D IIC
M	Miniature Head
P	Plastic Head
Other	Consult Factory

GN	Grounded Rounded Tip
UN	Ungrounded Rounded Tip

Type of T/C	Description
K	Chromal/Alumal
J	Iron/Constantan
N	Nicrosil-Nisil
T	Copper/Constantan
E	Ni-Cr/Constantan
Other	Consult Factory
Ex. :	If Simplex - K Duplex - KK

1	Ø1mm
1.5	Ø1.5mm
3	Ø3mm
4.5	Ø4.5mm
6	Ø6mm
8	Ø8mm

316	SS 316
310	SS 310
600	Inconel-600
Other	Consult Factory

316	SS 316
310	SS 310
304	SS 304
600	Inconel-600
800	Inconel-800
446	HRS-446
Other	Consult Factory

A	1/2" SCH 80
B	1/2" SCH 40
Other	Consult Factory

Flange Rating	Flange Size
# 150	1/2"
# 300	3/4"
# 400	1"
# 400	1 1/2"
# 600	1 1/4"
	2"
Other	Consult Factory

Threads	1/4"	
	1/2"	
	3/4"	
	3/8"	
	1"	
	1 1/4"	
B.S.P. / N.P.T.	1 1/2"	
	2"	
	M-Thread	M20X1.5, M18X1.5, M33X2, M27X2
	Other	Consult Factory