


THERMOCOUPLE WITH FLANGE N/U/N & STEPPED THERMOWELL

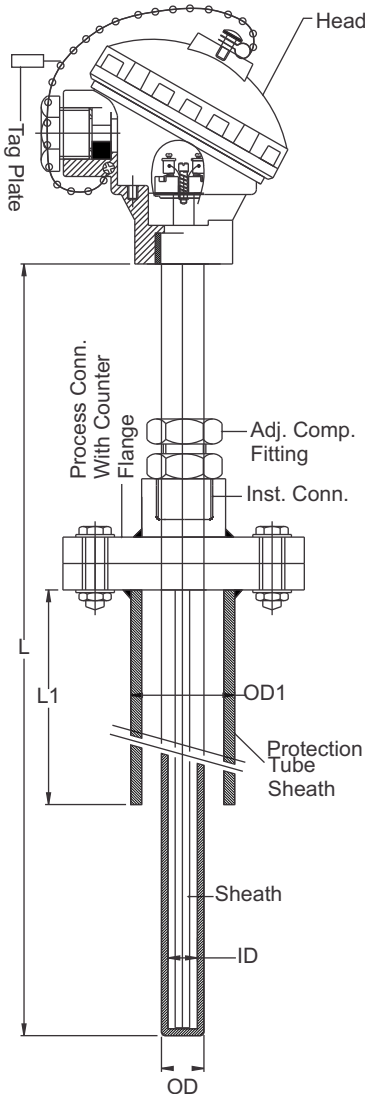

T-734

Termination Style	<input type="text"/>	<table border="1"> <tr><td>C</td><td>Connection Head IP-67</td></tr> <tr><td>D</td><td>Double entry Head IP-65</td></tr> <tr><td>EB</td><td>Ex-D IIB Zone 1&2</td></tr> <tr><td>EC</td><td>Ex-D IIC</td></tr> <tr><td>M</td><td>Miniature Head</td></tr> <tr><td>P</td><td>Plastic Head</td></tr> <tr><td>Other</td><td>Consult Factory</td></tr> </table>	C	Connection Head IP-67	D	Double entry Head IP-65	EB	Ex-D IIB Zone 1&2	EC	Ex-D IIC	M	Miniature Head	P	Plastic Head	Other	Consult Factory						
C	Connection Head IP-67																					
D	Double entry Head IP-65																					
EB	Ex-D IIB Zone 1&2																					
EC	Ex-D IIC																					
M	Miniature Head																					
P	Plastic Head																					
Other	Consult Factory																					
Junction Style	<input type="text"/>	<table border="1"> <tr><td>GN</td><td>Grounded Rounded Tip</td></tr> <tr><td>UN</td><td>Ungrounded Rounded Tip</td></tr> </table>	GN	Grounded Rounded Tip	UN	Ungrounded Rounded Tip																
GN	Grounded Rounded Tip																					
UN	Ungrounded Rounded Tip																					
Thermocouple Element	<input type="text"/>	<table border="1"> <thead> <tr><th>Type of T/C</th><th>Description</th></tr> </thead> <tbody> <tr><td>K</td><td>Chromal/Alumal</td></tr> <tr><td>J</td><td>Iron/Constantan</td></tr> <tr><td>N</td><td>Nicrosil-Nisil</td></tr> <tr><td>T</td><td>Copper/Constantan</td></tr> <tr><td>E</td><td>Ni-Cr/Constantan</td></tr> <tr><td>Other</td><td>Consult Factory</td></tr> <tr><td>Ex. :</td><td>If Simplex - K Duplex - KK</td></tr> </tbody> </table>	Type of T/C	Description	K	Chromal/Alumal	J	Iron/Constantan	N	Nicrosil-Nisil	T	Copper/Constantan	E	Ni-Cr/Constantan	Other	Consult Factory	Ex. :	If Simplex - K Duplex - KK				
Type of T/C	Description																					
K	Chromal/Alumal																					
J	Iron/Constantan																					
N	Nicrosil-Nisil																					
T	Copper/Constantan																					
E	Ni-Cr/Constantan																					
Other	Consult Factory																					
Ex. :	If Simplex - K Duplex - KK																					
Sheath "OD"	<input type="text"/>	<table border="1"> <tr><td>1</td><td>Ø1mm</td></tr> <tr><td>1.5</td><td>Ø1.5mm</td></tr> <tr><td>3</td><td>Ø3mm</td></tr> <tr><td>4.5</td><td>Ø4.5mm</td></tr> <tr><td>6</td><td>Ø6mm</td></tr> <tr><td>8</td><td>Ø8mm</td></tr> </table>	1	Ø1mm	1.5	Ø1.5mm	3	Ø3mm	4.5	Ø4.5mm	6	Ø6mm	8	Ø8mm								
1	Ø1mm																					
1.5	Ø1.5mm																					
3	Ø3mm																					
4.5	Ø4.5mm																					
6	Ø6mm																					
8	Ø8mm																					
Sheath Material	<input type="text"/>	<table border="1"> <tr><td>316</td><td>SS 316</td></tr> <tr><td>310</td><td>SS 310</td></tr> <tr><td>600</td><td>Inconel-600</td></tr> <tr><td>Other</td><td>Consult Factory</td></tr> </table>	316	SS 316	310	SS 310	600	Inconel-600	Other	Consult Factory												
316	SS 316																					
310	SS 310																					
600	Inconel-600																					
Other	Consult Factory																					
Thermowell Material	<input type="text"/>	<table border="1"> <tr><td>316</td><td>SS 316</td></tr> <tr><td>310</td><td>SS 310</td></tr> <tr><td>304</td><td>SS 304</td></tr> <tr><td>600</td><td>Inconel-600</td></tr> <tr><td>800</td><td>Inconel-800</td></tr> <tr><td>446</td><td>HRS-446</td></tr> <tr><td>Other</td><td>Consult Factory</td></tr> </table>	316	SS 316	310	SS 310	304	SS 304	600	Inconel-600	800	Inconel-800	446	HRS-446	Other	Consult Factory						
316	SS 316																					
310	SS 310																					
304	SS 304																					
600	Inconel-600																					
800	Inconel-800																					
446	HRS-446																					
Other	Consult Factory																					
Thermowell OD (mm)	<input type="text"/>																					
ID (mm)	<input type="text"/>																					
Protection Tube Material	<input type="text"/>																					
Protection Tube OD(mm)	<input type="text"/>																					
Length of "T" (mm)	<input type="text"/>	<table border="1"> <thead> <tr><th>Flange Rating</th><th>Flange Size</th></tr> </thead> <tbody> <tr><td># 150</td><td>1/2"</td></tr> <tr><td># 300</td><td>3/4"</td></tr> <tr><td># 400</td><td>1"</td></tr> <tr><td># 600</td><td>1 1/2"</td></tr> <tr><td># 600</td><td>1 1/4"</td></tr> <tr><td>2"</td><td></td></tr> <tr><td>Other</td><td>Consult Factory</td></tr> </tbody> </table>	Flange Rating	Flange Size	# 150	1/2"	# 300	3/4"	# 400	1"	# 600	1 1/2"	# 600	1 1/4"	2"		Other	Consult Factory				
Flange Rating	Flange Size																					
# 150	1/2"																					
# 300	3/4"																					
# 400	1"																					
# 600	1 1/2"																					
# 600	1 1/4"																					
2"																						
Other	Consult Factory																					
Process Connection	<input type="text"/>																					
Flange Material	<input type="text"/>																					
Inst. Connection	<input type="text"/>	<table border="1"> <tr><td>Threads</td><td>1/4"</td></tr> <tr><td></td><td>1/2"</td></tr> <tr><td></td><td>3/4"</td></tr> <tr><td></td><td>3/8"</td></tr> <tr><td></td><td>1"</td></tr> <tr><td>B.S.P. / N.P.T.</td><td>1 1/4"</td></tr> <tr><td></td><td>1 1/2"</td></tr> <tr><td></td><td>2"</td></tr> <tr><td>M-Thread</td><td>M20X1.5, M18X1.5, M33X2, M27X2</td></tr> <tr><td>Other</td><td>Consult Factory</td></tr> </table>	Threads	1/4"		1/2"		3/4"		3/8"		1"	B.S.P. / N.P.T.	1 1/4"		1 1/2"		2"	M-Thread	M20X1.5, M18X1.5, M33X2, M27X2	Other	Consult Factory
Threads	1/4"																					
	1/2"																					
	3/4"																					
	3/8"																					
	1"																					
B.S.P. / N.P.T.	1 1/4"																					
	1 1/2"																					
	2"																					
M-Thread	M20X1.5, M18X1.5, M33X2, M27X2																					
Other	Consult Factory																					
Adj. Comp. Fitting	<input type="text"/>																					
Tip Length (T.L.) (mm)	<input type="text"/>																					
Protection Tube Length "L1"(mm)	<input type="text"/>																					
Nominal Length of T/C "L" (mm)	<input type="text"/>																					