


THERMOCOUPLE WITH TAPER THERMOWELL & ADJUSTABLE FLANGE

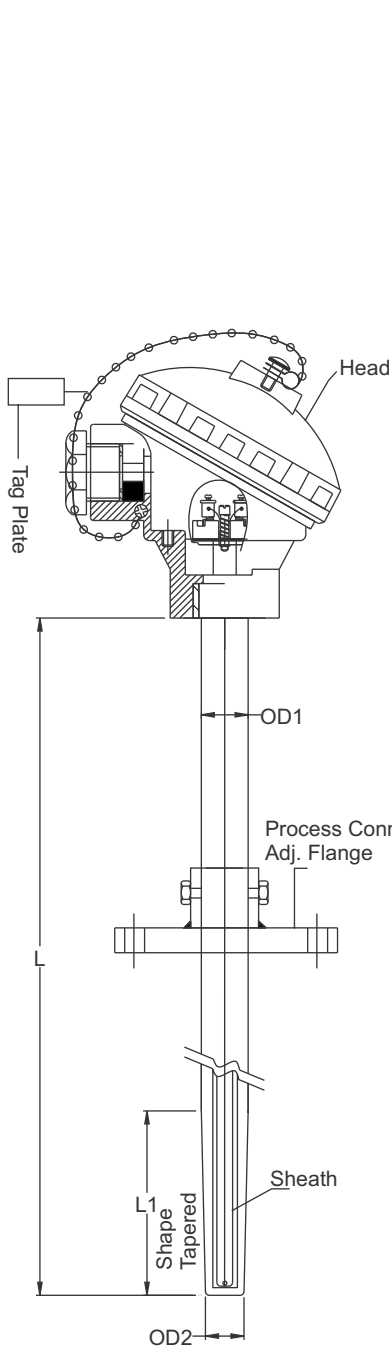

T-503

Termination Style

C	Connection Head IP-67
D	Double entry Head IP-65
EB	Ex-D IIB Zone 1&2
EC	Ex-D IIC
M	Miniature Head
P	Plastic Head
Other	Consult Factory

Junction Style

GN	Grounded Rounded Tip
UN	Ungrounded Rounded Tip

Thermocouple Element

Type of T/C	Description
K	Chromal/Alumal
J	Iron/Constantan
N	Nicrosil-Nisil
T	Copper/Constantan
E	Ni-Cr/Constantan
Other	Consult Factory
Ex. :	If Simplex - K Duplex - KK

Sheath "OD"

1	Ø1mm
1.5	Ø1.5mm
3	Ø3mm
4.5	Ø4.5mm
6	Ø6mm
8	Ø8mm
Other	Consult Factory

Sheath Material

316	SS 316
310	SS 310
600	Inconel-600
Other	Consult Factory

Thermowell OD1 (mm)

Thermowell OD2 (mm)

Thermowell "ID" (mm)

Outer Sheath Material

316	SS 316
310	SS 310
304	SS 304
600	Inconel-600
800	Inconel-800
446	HRS- 446
Other	Consult Factory

Flange Material

316	SS 316
310	SS 310
304	SS 304
C S	Cast Steel
Other	Consult Factory

Taper Length (L1) (mm)

Nominal Length of T/C "L" (mm)