


THERMOCOUPLE WITH OUTER-INNER PROTECTION TUBE & COUNTER FLANGE

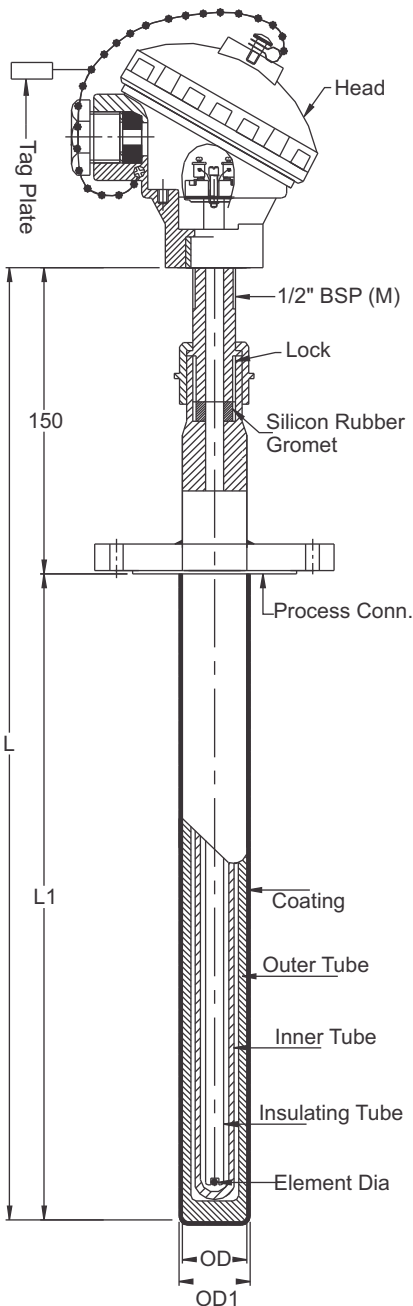

T-903

Termination Style	<input type="text"/>	C	Connection Head IP-67
		D	Double entry Head IP-65
		EB	Ex-D IIB Zone 1&2
		EC	Ex-D IIC
		M	Miniature Head
		P	Plastic Head
		Other	Consult Factory
Junction Style	<input type="text"/>	GN	Grounded
		UN	Ungrounded
Thermocouple Element	<input type="text"/>	Type of T/C	Description
		R	Pt-Rh 13%Pt
		S	Pt-Rh 10% Pt
		B	Pt-Rh 30% Pt-Rh 6%
		Ex.:	If Simplex-R Duplex-RR
Element Dia	<input type="text"/>	0.35	Ø0.35mm
		0.40	Ø0.40mm
		0.45	Ø0.45mm
		0.50	Ø0.50mm
		Other	Consult Factory
Insulating Tube OD	<input type="text"/>	3.5	Ø3.5mm
		4.5	Ø4.5mm
		5.5	Ø5.5mm
		8.5	Ø8.5mm
Insulating Tube Material	<input type="text"/>	610	Ceramic- 610
		710	Ceramic- 710
Inner tube Material	<input type="text"/>	316	SS 316
		310	SS 310
		304	SS 304
Outer Tube OD X ID	<input type="text"/>	600	Inconel 600
		800	Inconel 800
Outer Tube Material	<input type="text"/>	610	Recrystallised Alumina Ceramic- Ker- 610
		710	Recrystallised Alumina Ceramic- Ker- 710
Sealing Stopper AT T/W Neck	<input type="text"/>	Flange Rating	Flange Size
Process Connection	<input type="text"/>	# 150	1/2"
		# 300	3/4"
		# 400	1"
		# 600	1 1/2"
			1 1/4"
			2"
		Other	Consult Factory
Flange Material	<input type="text"/>	PTFE	PTFE Coating
Coating	<input type="text"/>	CERAMIC	CeramicCoating
		TC	Tungsten Carbide Coating
Length L1 (mm)	<input type="text"/>	STR	Sterlite Coating
Nominal Length Of T/C "L"(mm)	<input type="text"/>	OTHER	Consult Factory